Sanitana

PEÇA:

DESCRIÇÃO: MONOCOMANDO LAVATÓRIO
SERIE: VIVA CARE
VERSÃO: CARE (COM MANÍPULO CLÍNICO)
REF.: S50202400012602

CARACTERÍSTICAS DO MODELO:

MATERIAL:
- CORPO: LATÃO
- ACABAMENTO: CROMADO, LACADO PRETO MATE

NORMAS:
- TORNEIRA: CONCEBIDA E TESTADO DE ACORDORDO COM A EN 817
- AREJADOR: CONCEBIDO E TESTADO DE ACORDORDO COM A EN 246

CARACTERÍSTICAS:
- AREJADOR Ø24 PCA® C\LIMITADOR ECOLÓGICO DE CAUDAL (PCA 5 L\m MAX.)
- LIGAÇÕES FLEXÍVEIS G3/8"
- PRESSÃO DE FUNCIONAMENTO: 0,5 a 6 bar
- CARTUCHO ECOLOGICO, DISCOS CERÂMICOS COM FUNÇÃO **COLD-START**

CAUDAIS:

VERSION	*AERATOR*	*FLOW RATE* VERSÃO
STANDARD	AREJADOR STANDARD	≈4,9 L\minuto (≈3 bar)
VERSÃO ECO +	AREJADOR *(SR5000000002338)*	≈3,1 L\minuto (≈3 bar)
VERSÃO ECO ++	AREJADOR *(TNR5000000002106)*	≈1,4 L\minuto (≈3 bar)

CAUDAIS + / ++ GARANTIDOS COM AREJADORES ESPECIAIS.

GARANTIA: 5 ANOS (CONSULTAR CONDIÇÕES GERAIS DE GARANTIA SANITANA)
PESO: 1,4 Kg


Unified Water Label

4,9 l/min

327,99 kWh/p.a

www.europeanwaterlabel.eu


CROQUIS COM DIMENSÕES GERAIS E LIGAÇÃO:

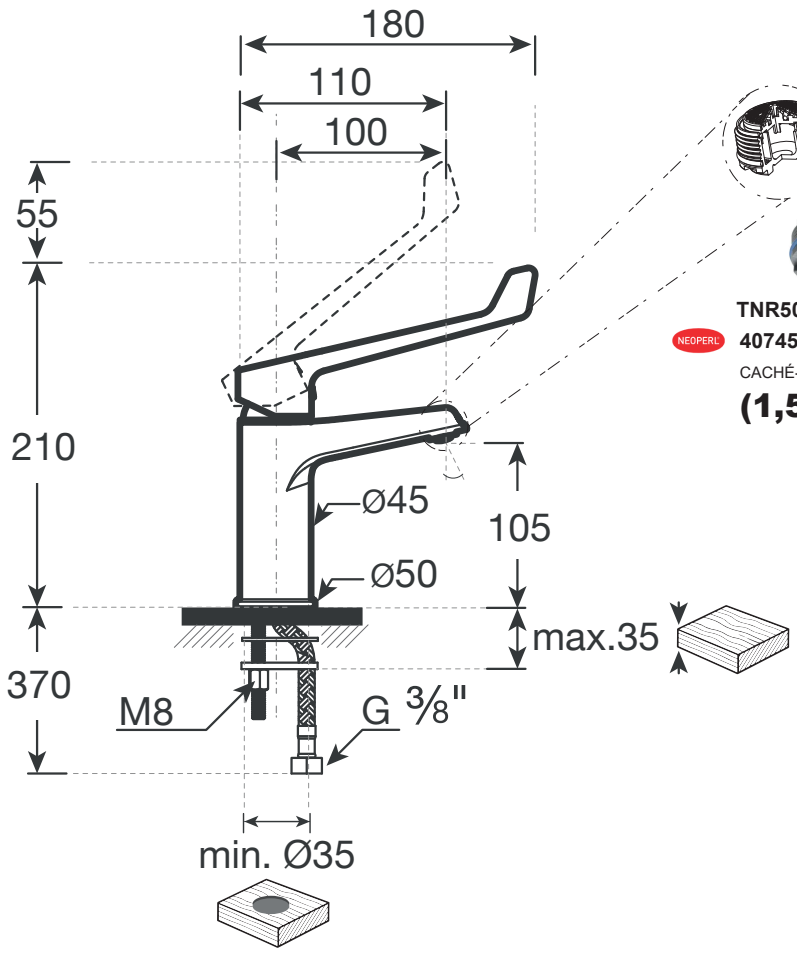

Optional



TNR5000000002106
NEOPERL **407459010**
CACHÉ-PCA-SPRAY-TJ-m M24
(1,5 litr./min.)

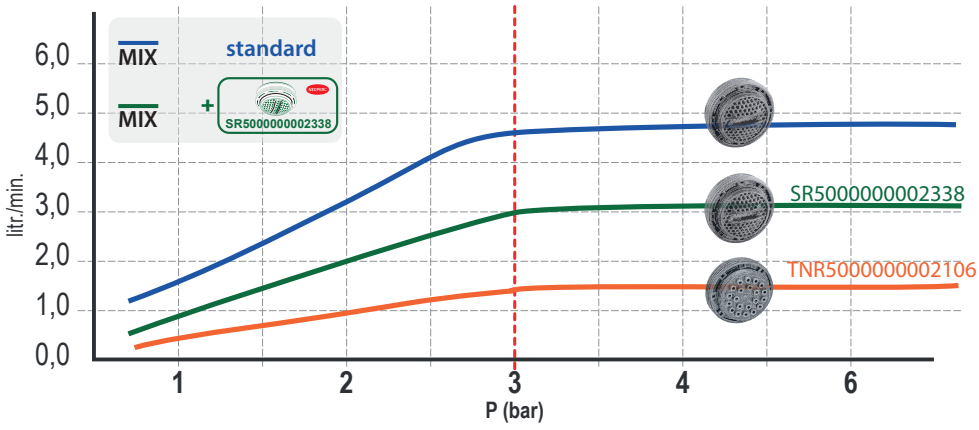



COMPONENTES INCLUÍDOS:

- FLEXÍVEIS DE ALIMENTAÇÃO DE 3/8"

PRODUTOS RELACIONADOS:

- VÁLVULAS: (OPCIONAL, VER CATÁLOGO GERAL)
- LAVATÓRIOS: (OPCIONAL, VER CATÁLOGO GERAL)

Os produtos apresentados seguem especificações técnicas internas da Sanitana SA. As dimensões são meramente indicativas. Para instalação à medida apenas devem ser consideradas as dimensões retiradas da peça a ser aplicada. Reservamos o direito de fazer alterações técnicas que permitam melhorar a funcionalidade dos nossos produtos sem aviso prévio.

Sanitana

PIECE:

DESCRIPTION: SINGLE-LEVER WASHBASIN MIXER
SERIES: VIVA CARE
VERSION: CARE (WITH CLINICAL LEVER)
REF.: S50202400012602

MODEL FEATURES:

MATERIAL:
- BODY: BRASS
- FINISHES: CHROME / MATT BLACK LACQUERED

STANDARDS:
- TAP: DESIGNED AND TESTED IN ACCORDANCE WITH EN 817
- AERATOR: DESIGNED AND TESTED IN ACCORDANCE WITH EN 246

FEATURES:
- Ø24 PCA® AERATOR WITH ECO FLOW LIMITER (PCA – MAX. 5 L/min)
- G3/8" FLEXIBLE CONNECTION HOSES
- OPERATING PRESSURE: 0.5 TO 6 bar
- ECO CARTRIDGE WITH CERAMIC DISCS AND COLD-START FUNCTION

FLOW:


VERSION	*AERATOR*	*FLOW RATE*
STANDARD	STANDARD AERATOR	≈ 4.9 L/min (≈ 3 bar)
ECO+	SPECIAL AERATOR *(SR5000000002338)*	≈ 3.1 L/min (≈ 3 bar)
ECO++	SPECIAL AERATOR *(TNR5000000002106)*	≈ 1.4 L/min (≈ 3 bar)

ECO+ / ECO++ FLOW RATES REQUIRE SPECIAL AERATORS.

Unified Water Label
4,9 l/min
327,99 kWh/p.a
ENERGY
www.europeanwaterlabel.eu

WARRANTY: 5 YEARS (REFER TO SANITANA GENERAL WARRANTY TERMS AND CONDITIONS)
WEIGHT: 1.4 kg


DRAWING WITH OVERALL DIMENSIONS AND CONNECTION:

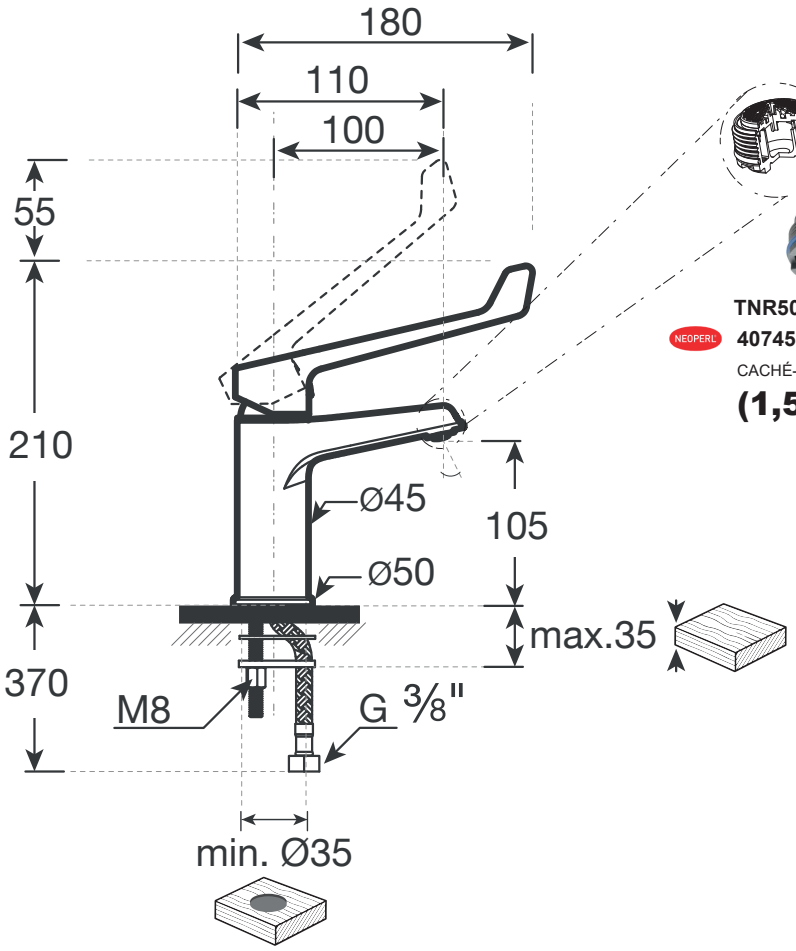

Optional



TNR5000000002106
NEOPERL **407459010**
CACHÉ-PCA-SPRAY-TJ-m M24
(1,5 litr./min.)

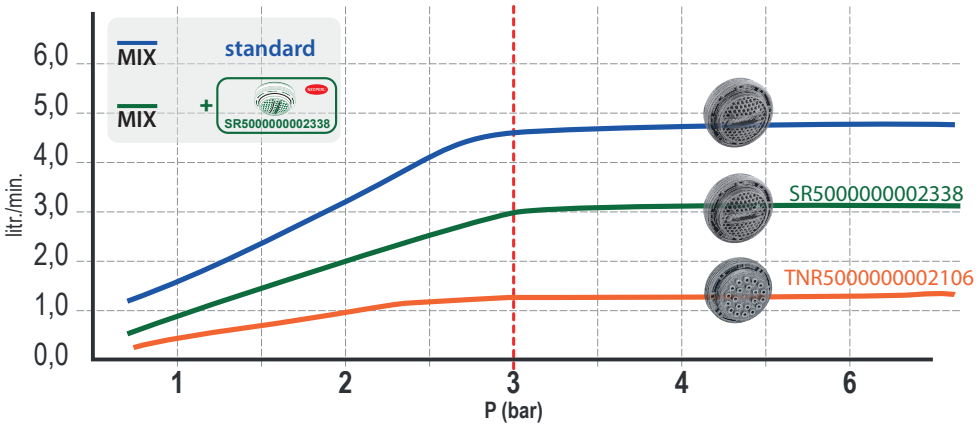



INCLUDED COMPONENTS:

- ⅜" FLEXIBLE SUPPLY HOSES

ASSOCIATED PRODUCTS:

- WASTE VALVES: (OPTIONAL, SEE GENERAL CATALOGUE)
- WASHBASINS: (OPTIONAL, SEE GENERAL CATALOGUE)

The products presented comply with Sanitana S.A.'s internal technical specifications. Dimensions are for guidance only. For made-to-measure installations, only the dimensions taken directly from the product to be installed should be considered. We reserve the right to make technical changes to improve the functionality of our products without prior notice.