Sanitana

PEÇA:

DESCRIÇÃO: MONOCOMANDO LAVATÓRIO
SERIE: NOA-N
VERSÃO: ALTURA STANDARD
REF.: S502207000###00



CARACTERÍSTICAS DO MODELO:

MATERIAL:
- CORPO: LATÃO
- ACABAMENTO: CROMADO, LACADO PRETO MATE

NORMAS:
- TORNEIRA: CONCEBIDA E TESTADO DE ACORDORDO COM A EN 817
- AREJADOR: CONCEBIDO E TESTADO DE ACORDORDO COM A EN 246

CARACTERÍSTICAS:
- AREJADOR Ø24 PCA® C\LIMITADOR ECOLÓGICO DE CAUDAL (PCA 5 L\m MAX.
- LIGAÇÕES FLEXÍVEIS G3/8''
- PRESSÃO DE FUNCIONAMENTO: 0,5 a 6 bar
- CARTUCHO ECOLOGICO, DISCOS CERÂMICOS

CAUDAIS:

VERSION	*AERATOR*	*FLOW RATE* VERSÃO
STANDARD	AREJADOR STANDARD	≈4,9 L\minuto (≈3 bar)
VERSÃO ECO +	AREJADOR *(SR5000000002338)*	≈3,2 L\minuto (≈3 bar)
VERSÃO ECO ++	AREJADOR *(TNR5000000002186)*	≈1,5 L\minuto (≈3 bar)


CAUDAIS + / ++ GARANTIDOS COM AREJADORES ESPECIAIS.

GARANTIA: 5 ANOS (CONSULTAR CONDIÇÕES GERAIS DE GARANTIA SANITANA)
PESO: 1,4 Kg

Unified Water Label
4,9l/min
327,99 kWh/p.a
ENERGY
www.europeanwaterlabel.eu

CROQUIS COM DIMENSÕES GERAIS E DE LIGAÇÃO:


(mm)

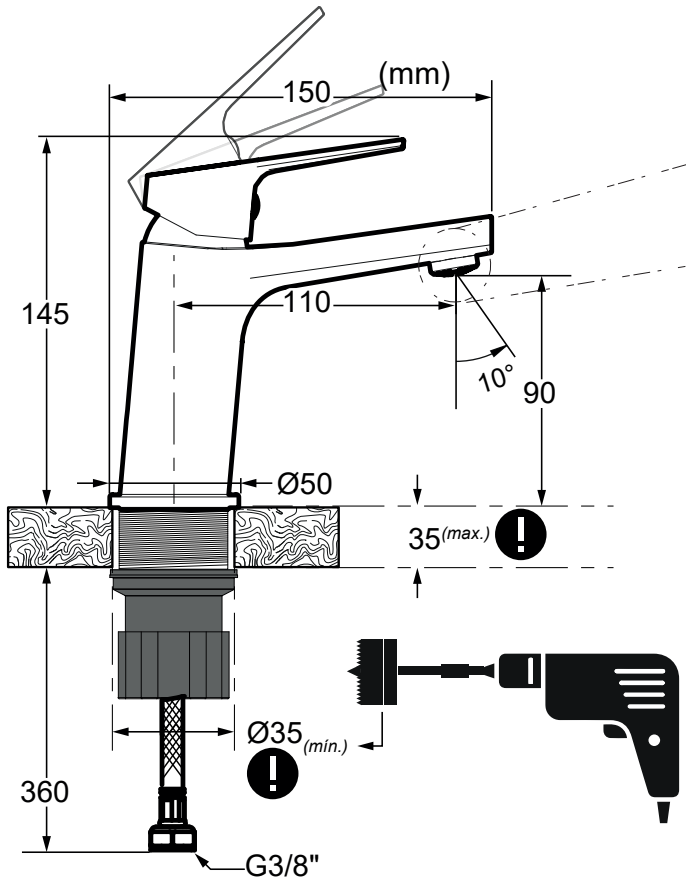

Optional



TNR5000000002186
NEOPERL **40.8559.01000**
CACHÉ-PCA-SPRAY-TJ-m M24
(1,5 litr./min.)

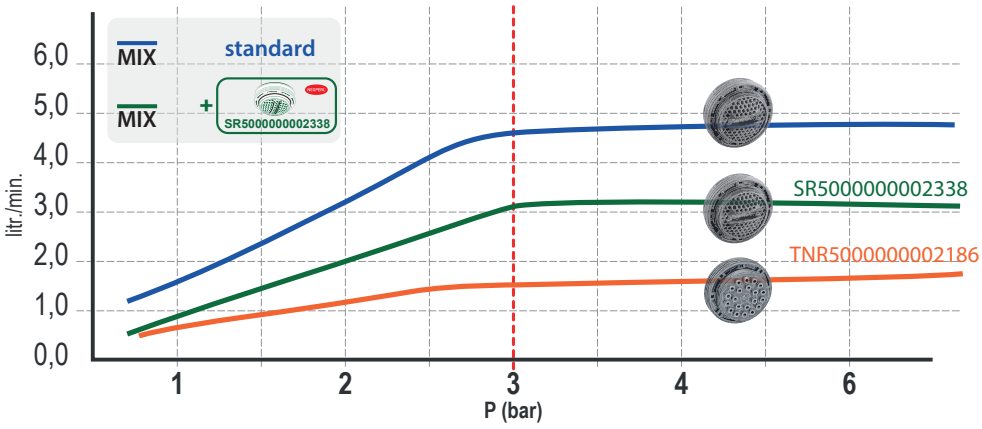



COMPONENTES INCLUÍDOS:

- *LIGAÇÕES DE ALIMENTAÇÃO FLEXÍVEIS INCLUÍDAS 3/8"*

PRODUTOS ASSOCIADOS:

- *VÁLVULAS DE ESGOTO (OPCIONAL, CONSULTAR CATÁLOGO)*
- *LAVATÓRIOS (OPCIONAL, CONSULTAR CATÁLOGO)*

Os produtos apresentados seguem especificações técnicas internas da Sanitana SA. As dimensões são meramente indicativas. Para instalação à medida apenas devem ser consideradas as dimensões retiradas da peça a ser aplicada. Reservamos o direito de fazer alterações técnicas que permitam melhorar a funcionalidade dos nossos produtos sem aviso prévio.

Sanitana

PIECE:

DESCRIPTION: SINGLE LEVER BASIN MIXER
SERIE: NOA-N
VERSION: STANDARD HIGTH BASIN MIXER
REF.: S502207000###00



MODEL FEATURES:

MATERIAL:
- BODY: BRASS
- FINISHES: CHROME / MATT BLACK LACQUERED


STANDARDS:
- TAP: DESIGNED AND TESTED IN ACCORDANCE WITH EN 817
- AERATOR: DESIGNED AND TESTED IN ACCORDANCE WITH EN 246

FEATURES:
- Ø24 PCA® AERATOR WITH ECO FLOW LIMITER (PCA – MAX. 5 L/min)
- G3/8" FLEXIBLE CONNECTION HOSES
- OPERATING PRESSURE: 0.5 TO 6 bar
- ECO CARTRIDGE WITH CERAMIC DISCS

FLOW:

VERSION	*AERATOR*	*FLOW RATE*
STANDARD	STANDARD AERATOR	≈ 4.9 L/min (≈ 3 bar)
ECO+	SPECIAL AERATOR *(SR5000000002338)*	≈ 3.2L/min (≈ 3 bar)
ECO++	SPECIAL AERATOR *(TNR5000000002186)*	≈ 1.5 L/min (≈ 3 bar)


ECO+ / ECO++ FLOW RATES REQUIRE SPECIAL AERATORS.



WARRANTY: 5 YEARS (REFER TO SANITANA GENERAL WARRANTY TERMS AND CONDITIONS)
WEIGHT: 1.4 kg

SKETCH WITH GENERAL AND CONNECTION DIMENSIONS:


(mm)

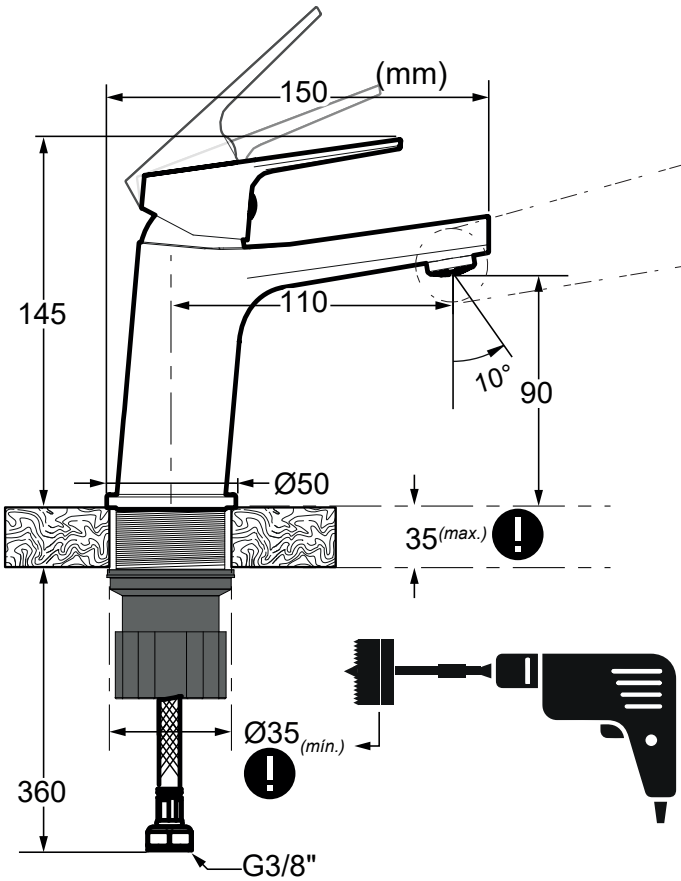

Optional



TNR5000000002186
NEOPERL **40.8559.01000**
CACHÉ-PCA-SPRAY-TJ-m M24
(1,5 litr./min.)

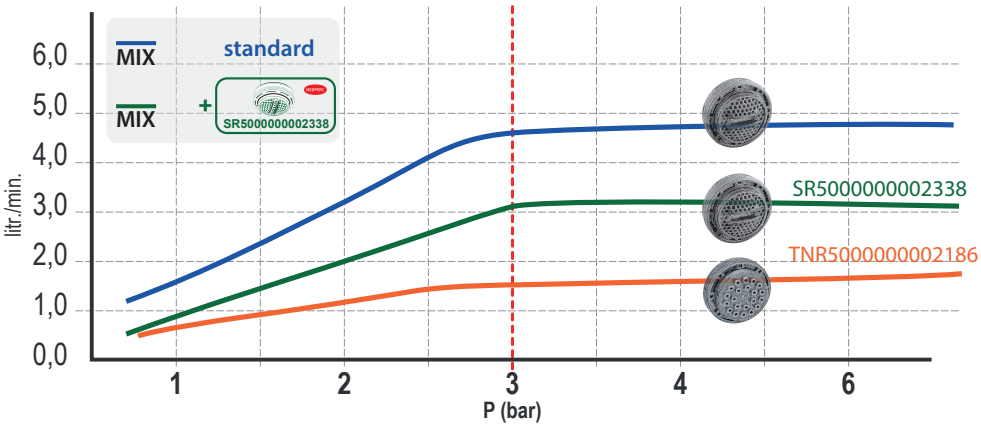



INCLUDED COMPONENTS:

- ***FLEXIBLE CONNECTING HOSES 3/8"***

PRODUTOS ASSOCIADOS:

- ***DRAIN VALVES (OPCIONAL, CONSULT GENERAL CATALOG)***
- ***WASHBASINS (OPCIONAL, CONSULT GENERAL CATALOG)***

The products presented follow technical specifications by Sanitana SA. Dimensions provided are indicative only. For custom installation, should only be considered the dimensions measured directly on the part to be installed. We reserve the right to make technical changes to improve the functionality of our products without prior notice.